


## LED LINEAR WALL WASHER

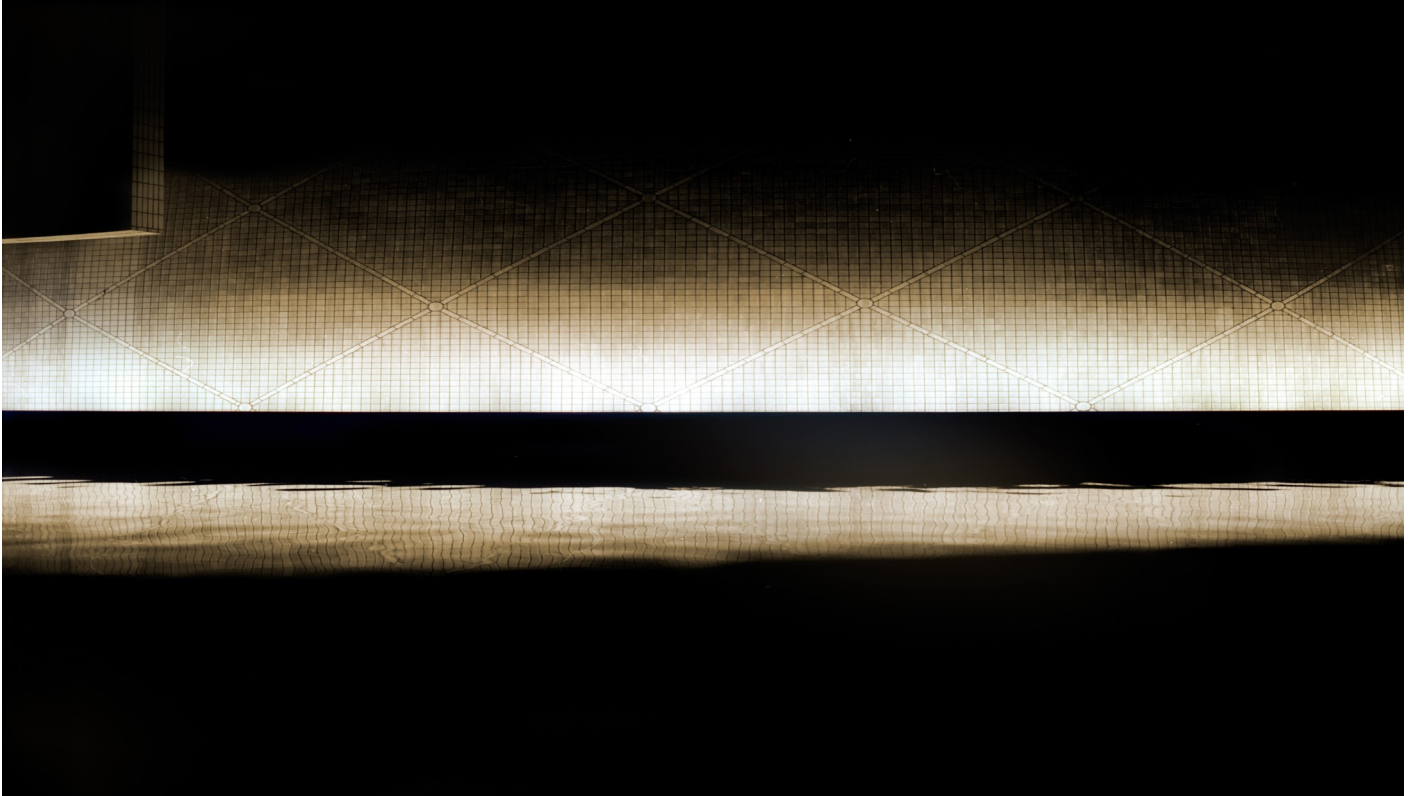


## PRODUCT FEATURES

LINEAR WALL WASHERS are small, compact and easy to hide in walls, facades or billboards. Made from 6063 aluminum alloy profile, with high pressure die-cast aluminum end covers and high transmittance toughened glass, this luminaire is easily installed and maintained. Two different installation brackets makes this linear wall light suitable for wall installation, facade installation, billboards and bridges.

- Two bracket installation options
- Linkable for longer applications
- 3030 LEDs
- 6063 Aluminium alloy profile
- High pressure die-cast aluminium end cover
- High transmittance toughened glass
- Optional dimming
- IP66 waterproof housing
- Light shield accessories option



# Product specifications

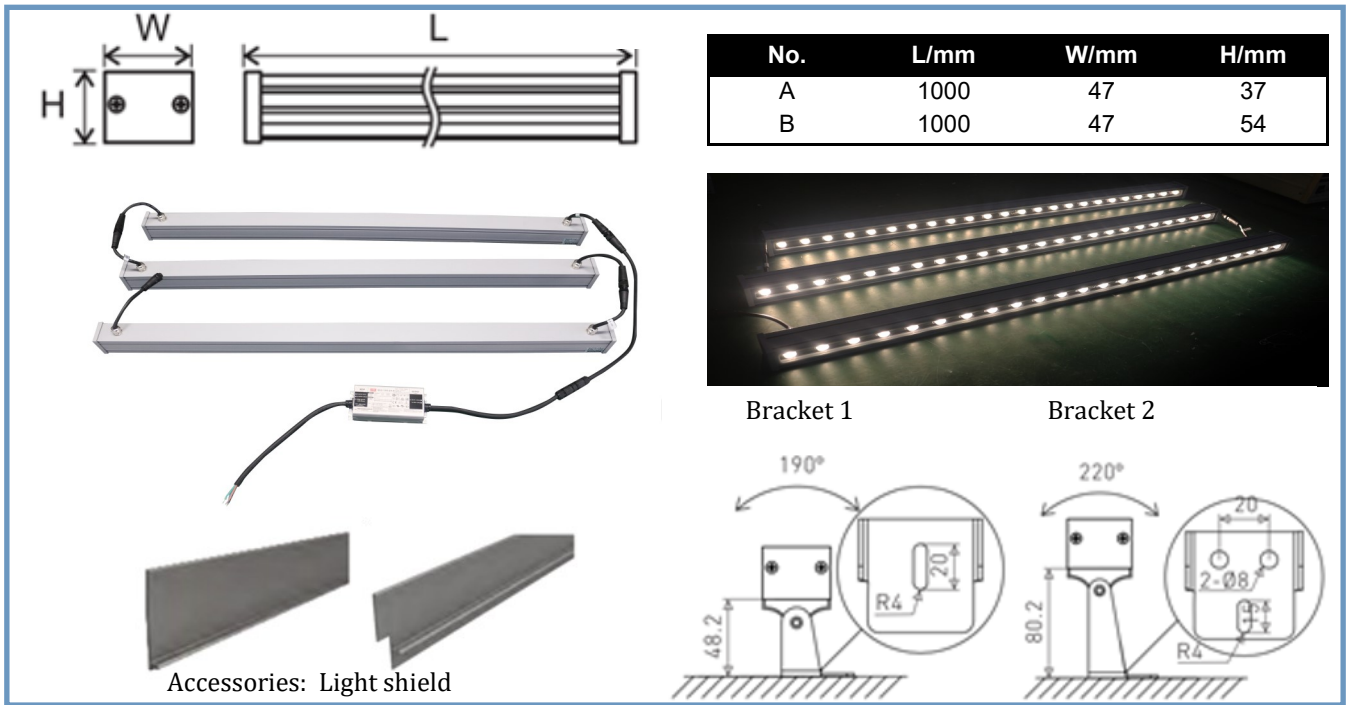

Colour temperature	3000K, 4000K or 5000K
Lumen output	1,800lm
Light source	3030 LEDs
CRI	≥70 Ra
Beam angle	20° or 40°
Power requirement	220 ~ 240V 50/60Hz : PF 0.95 flicker free
Power consumption	24W
Housing	6063 Aluminium alloy with high pressure die-cast aluminium end covers High transmittance toughened glass
Lifespan	50,000hrs
Colour	Aluminium finish, custom powder coat colours on request
Operating temperature	-20°C ~ 45°C
Protection Rating	IP66 weatherproof
Warranty	5 Years
Standards	EN 55015:2006+A1:2007+A2:2009 / EN 61000-3-2:2006+A1:2009+A2:2009 / EN 61000-3-3:2008/EN 61547:2009

CODE	WATTS	COLOUR TEMP	LUMENS	PRODUCT WEIGHT
WL-WW-A24-3K	24W	3000K	1789 lm	1.69kg
WL-WW-A24-4K		4000K	1879 lm	
WL-WW-A24-5K		5000K	2018 lm	
WL-WW-B24-3K		3000K	1789 lm	2.0kg
WL-WW-B24-4K		4000K	1879 lm	
WL-WW-B24-5K		5000K	2018 lm	



\* With the rapid development of LED technology, Dolphin Lighting reserves the right to change data and specifications without notice.