

LED LINEAR DUO SERIES with ambient backlight



PRODUCT FEATURES

LED LINEAR DUO with ambient backlight is a flexible option for those looking to customise their lighting.

The Series can be simply used as individual lengths, or connected together to provide upward and downward lighting, offering unlimited design options. Light configuration can even be changed or added to as the lighting requirements change over time. The LINEAR Series' versatility is further enhanced with dimming, Dali control integration and emergency backup options.

The simplicity of the suspension mounted option allows for limitless applications.

- Main down light with ambient backlight
- Black, white or silver aluminium finish
- Triac, 1-10V or Dali dimming
- Optional emergency backup
- Flicker-free, Boke driver
- Standard opal beam angle 110°
- High lumen output from Edison 2835 LEDs
- Suspended mounting
- IP20 weatherproof rating



Product specifications




LINEAR DUO

Linear Duo connectable series with ambient backlight.

Black, white or aluminium housing finish.

Suspension mounted and available in 600mm, 900mm, 1200mm, 1500mm or 1800mm lengths.

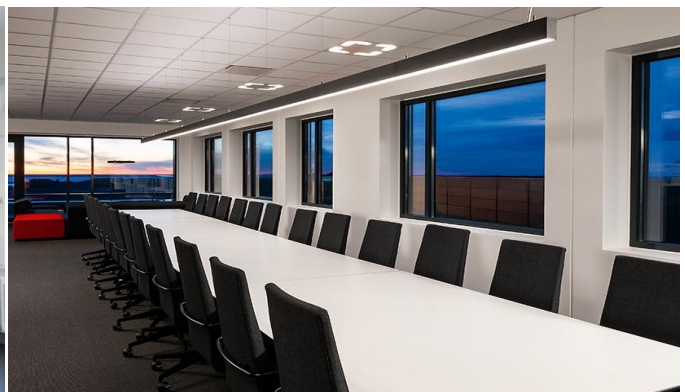

SPECIFICATIONS	LINEAR UP/DOWN SERIES					
72mm x 90mm x	600mm	900mm	1200mm	1500mm	1800mm	
Code	LINEAR-DUO	600-30W-_K	900-40W-_K	1200-50W-_K	1500-60W-_K	1800-80W-_K
Colour temperature	3000K, 4000K, 5000K					
Efficiency	>100lm/w					
Light source	Edison 2835 LEDs					
CRI	≥80 Ra					
Beam angle	110°					
Dimming	Optional Triac, 1-10V, Dali					
Driver	Boke, Flicker Free, PF: 0.90					
Power requirement	AC100-277V					
Operating temp.	-25°C ~ 45°C					
Lifespan	> 50,000 hours					
Options	Emergency back up					
Accessories	Surface bracket, 1.5m suspension wire kit					
Warranty	5 Years					

*Numerous other standard and custom options available.



* With the rapid development of LED technology, Dolphin Lighting reserves the right to change data and specifications without notice.

www.dolphinlighting.com.au