

LED SLIMLINE BATTEN




PRODUCT FEATURES

SLIMLINE BATTENS are perfect for new installations with a design feature that includes a large terminal block for easy installation. Set-and-forget switch to choose colour temperature at installation.

- 2FT or 4FT option
- CCT changeable - 3K, 4K or 5K
- 120° Beam angle
- Aluminium base with PC lens
- Large terminal block
- IP20 housing
- IK08 impact resistant



Product specifications

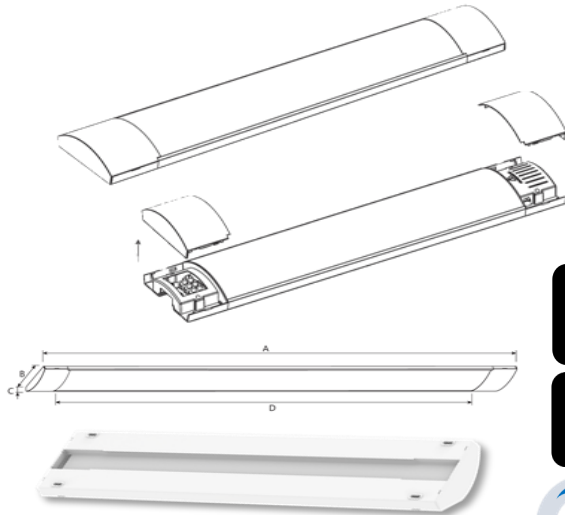

IK08

IP20



Slimline Batten

Slimline Batten Series

Perfect for new installations in residential application, our design features a cable channel and terminal block to allow easy installation. Set-and-forget switch to choose colour temperature at installation.



SPECIFICATIONS	ECO-SLM-2FT-20W-CS	ECO-SLM-4FT-35W-CS
Colour temperature	3000K, 4000K or 5000K	
Lumen	2,100lm ~ 2,800lm	3,300lm ~ 4,000lm
Efficiency	>105lm/w	>94lm/w
Power	20W	35W
Light source	LEDs	
CRI	≥80 Ra	
Beam angle	120°	
Power requirement	200-240V	
Operating temperature	-20°C ~ 45°C	
Lifespan	> 50,000 hours	
Housing	Aluminium base with PC diffuser	
Dimensions (LxWxH)	600 x 80 x 34mm	1200 x 80 x 34mm
Weight	600g	1.12kgs
Protection rating	IP20	
Impact rating	IK08	
Warranty	3 Years	



* With the rapid development of LED technology, Dolphin Lighting reserves the right to change data and specifications without notice.

www.dolphinlighting.com.au